



Solar Sausage for Water Desalination

Team 07: Alexandra Filardo, Joseph Hamel, Alex Stringer, Crystal Wells
 FAMU-FSU College of Engineering, Tallahassee FL

Introduction:

Motivation: Many of the developing countries lack access to clean drinking water

Goal: Utilize the Solar Sausage in mass production for desalinating water

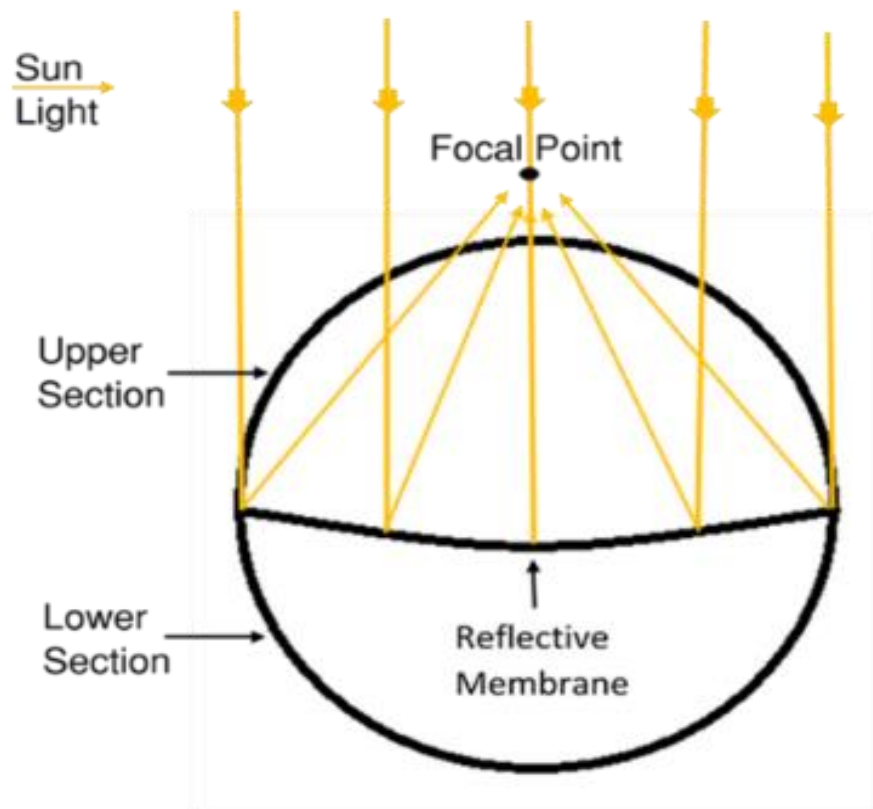


Figure 1. Visual display of the Solar Sausage technology

- The Solar Sausage is an inexpensive alternative to parabolic solar collectors
- Desalination provides clean water where saline water is abundant
- \$5,000 entrepreneurial project


Objectives:

- Must be inexpensive and simple for mass production and commercialization
- Must support a small family
- Easily transported and easily deconstructed
- Meet water standards set by World Health Organization

General Layout:


Condenser

- Water vapor collected, condensed and channeled to collection pipe.
- 2 inch elevation at one end
- Condensing Hood made of 4 Mil Transparent Plastic

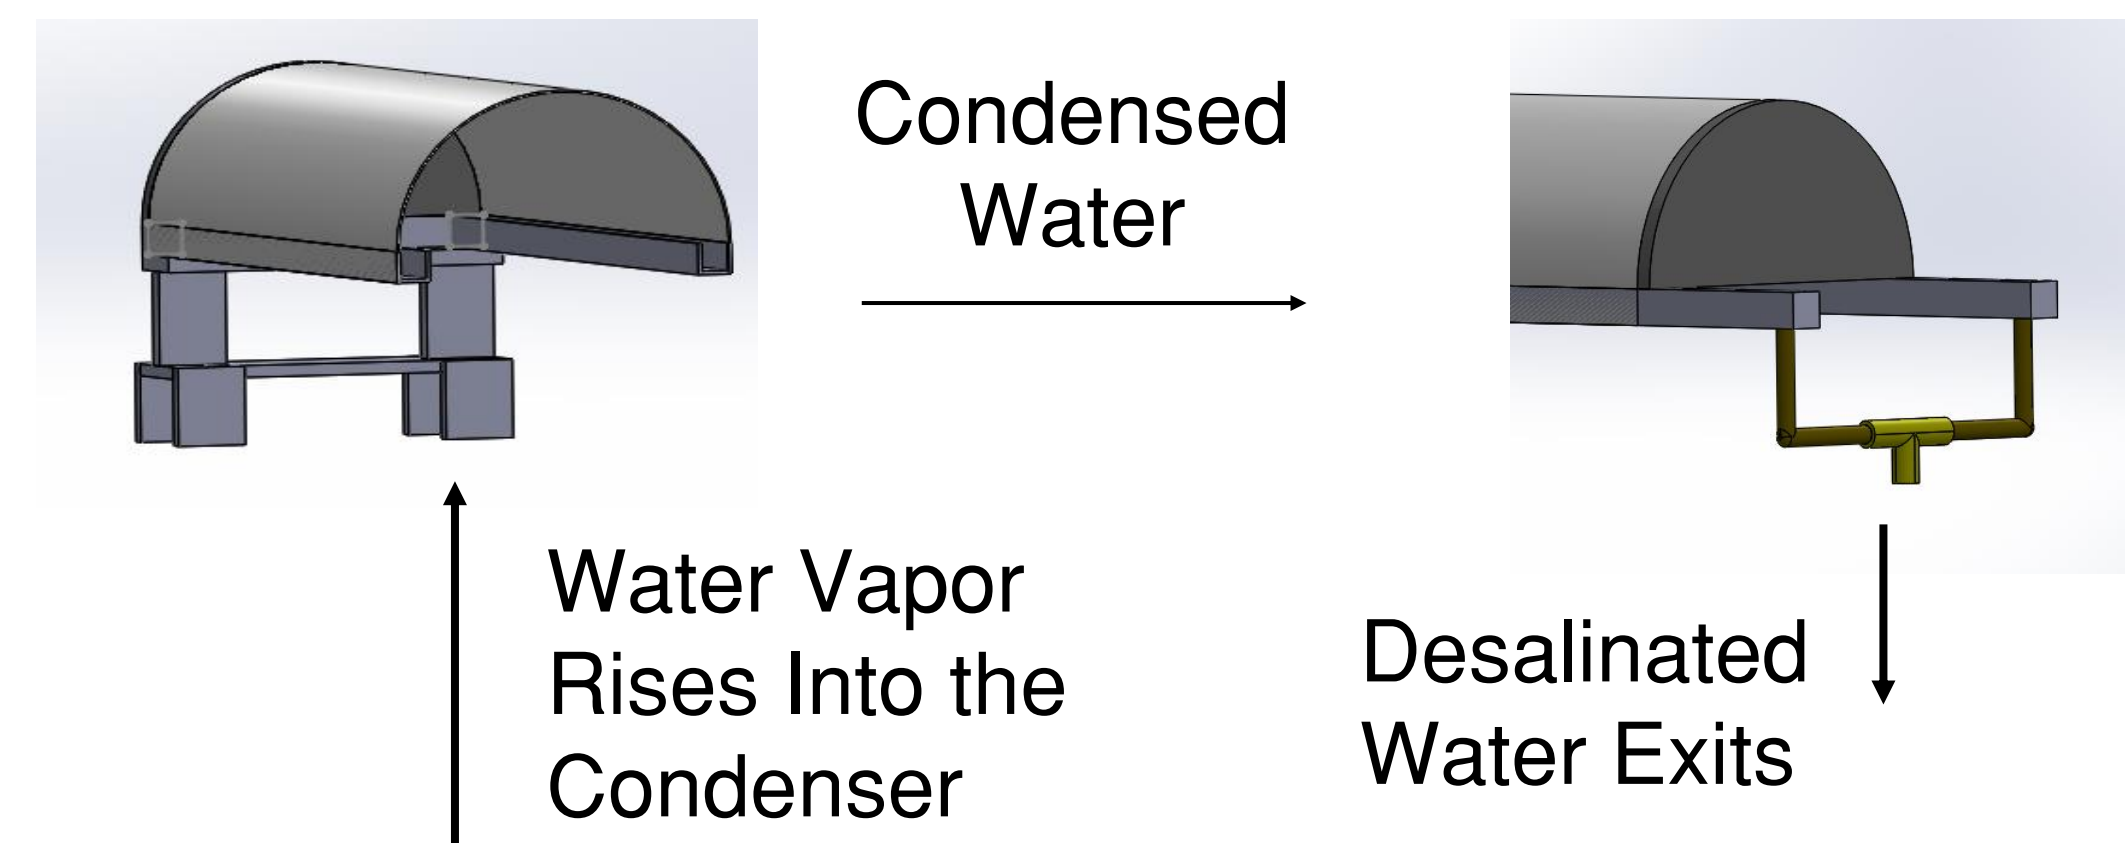

Trough

- Solar Sausage heats the bottom of the trough
- Water vapor rise, salt collects in the bottom of the trough

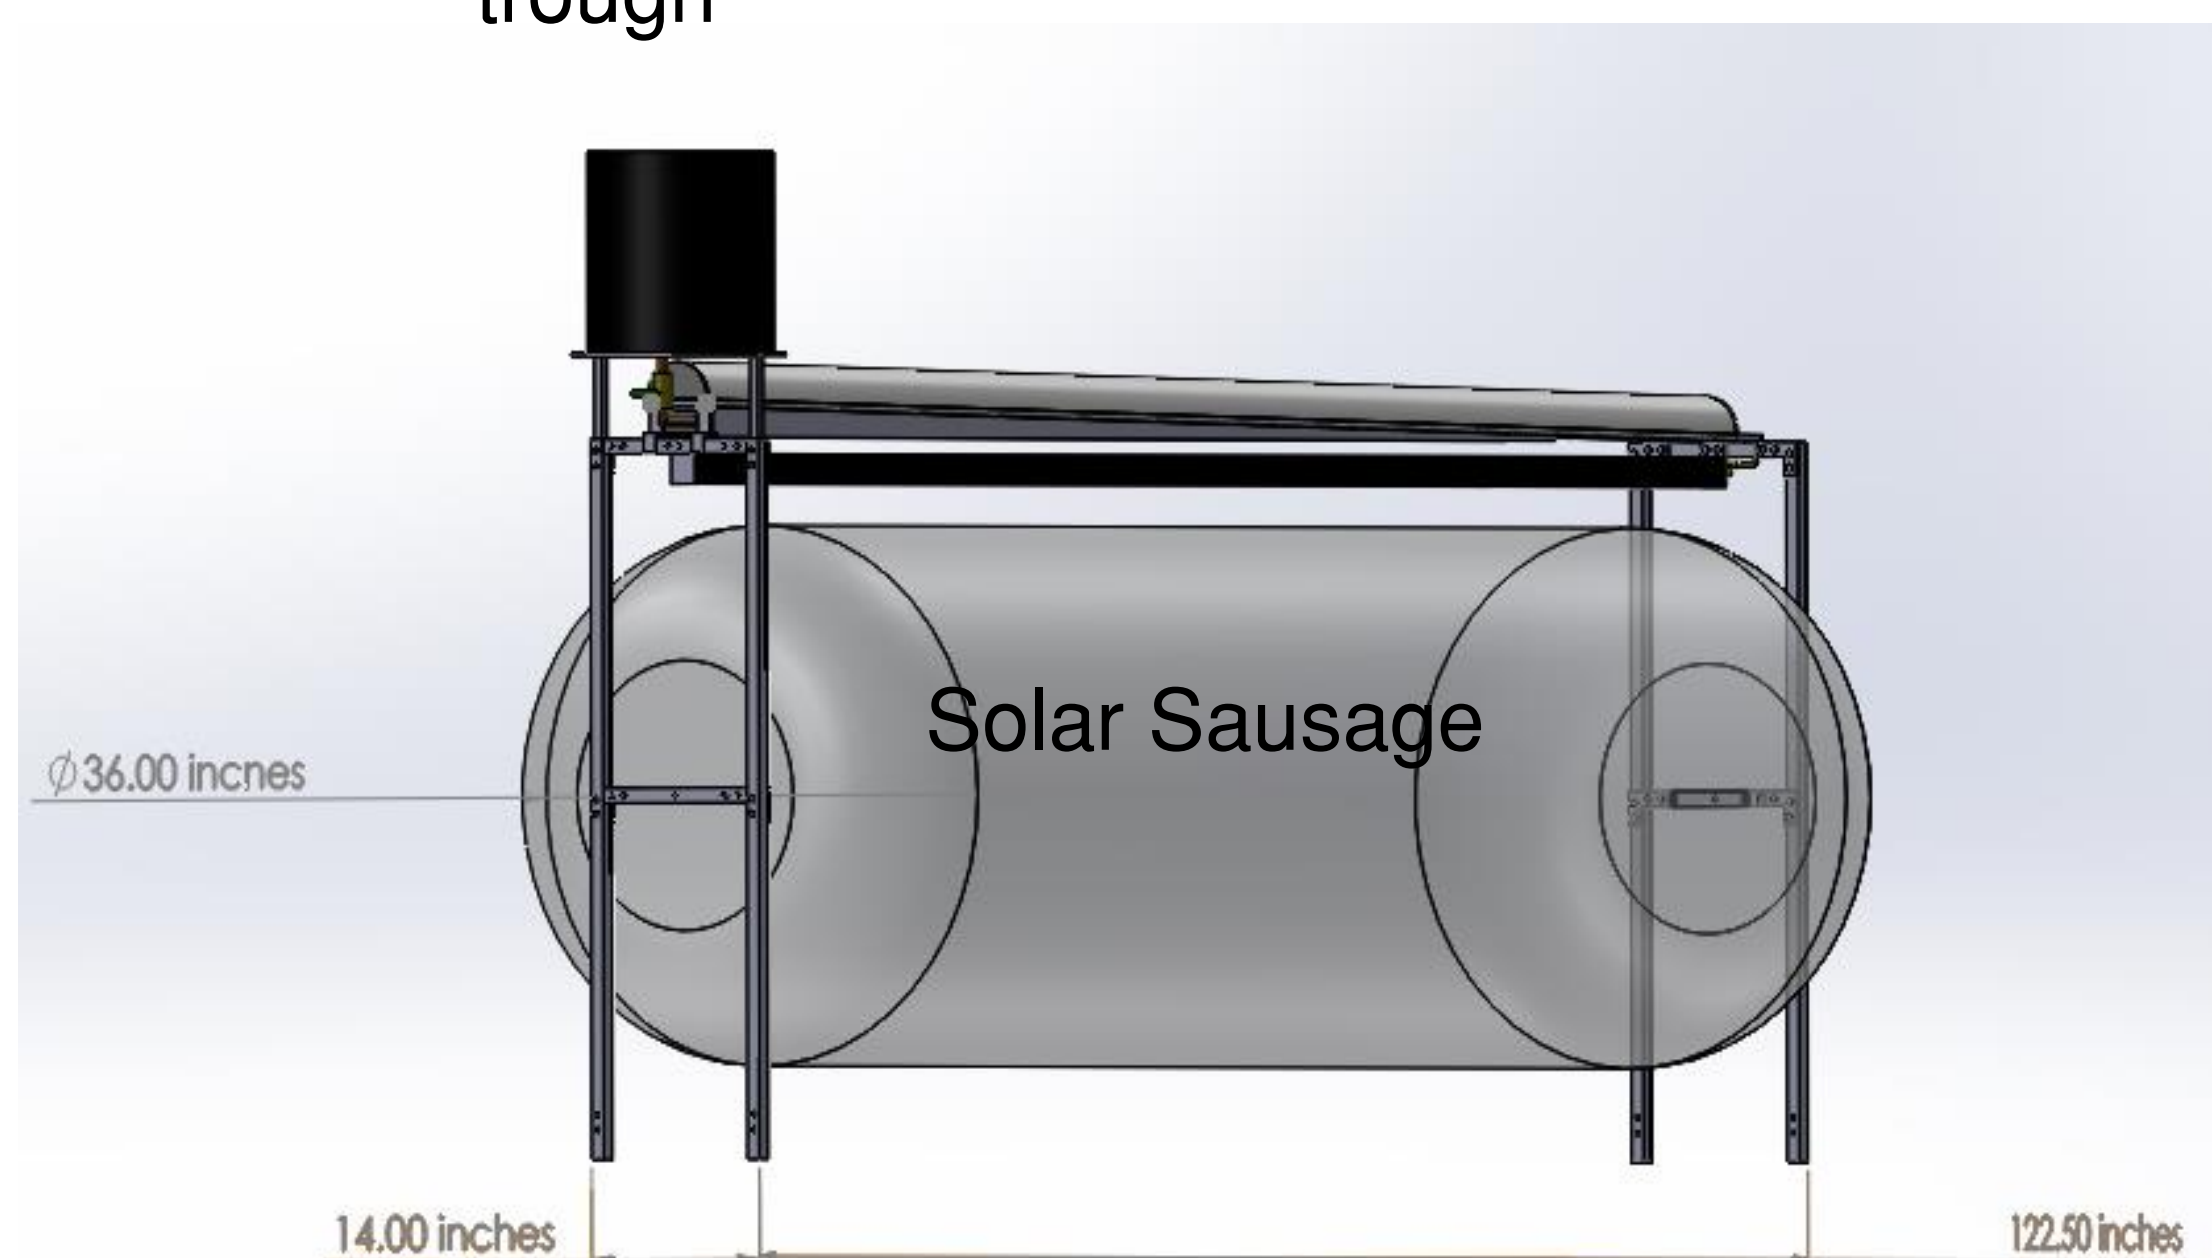

Storage Tank

- 5 Gallon Bucket. U.N Water Safe
- .5 inch Ball Valve controls water flow

Stand

- Constructed of 1 inch square Aluminum Tubing

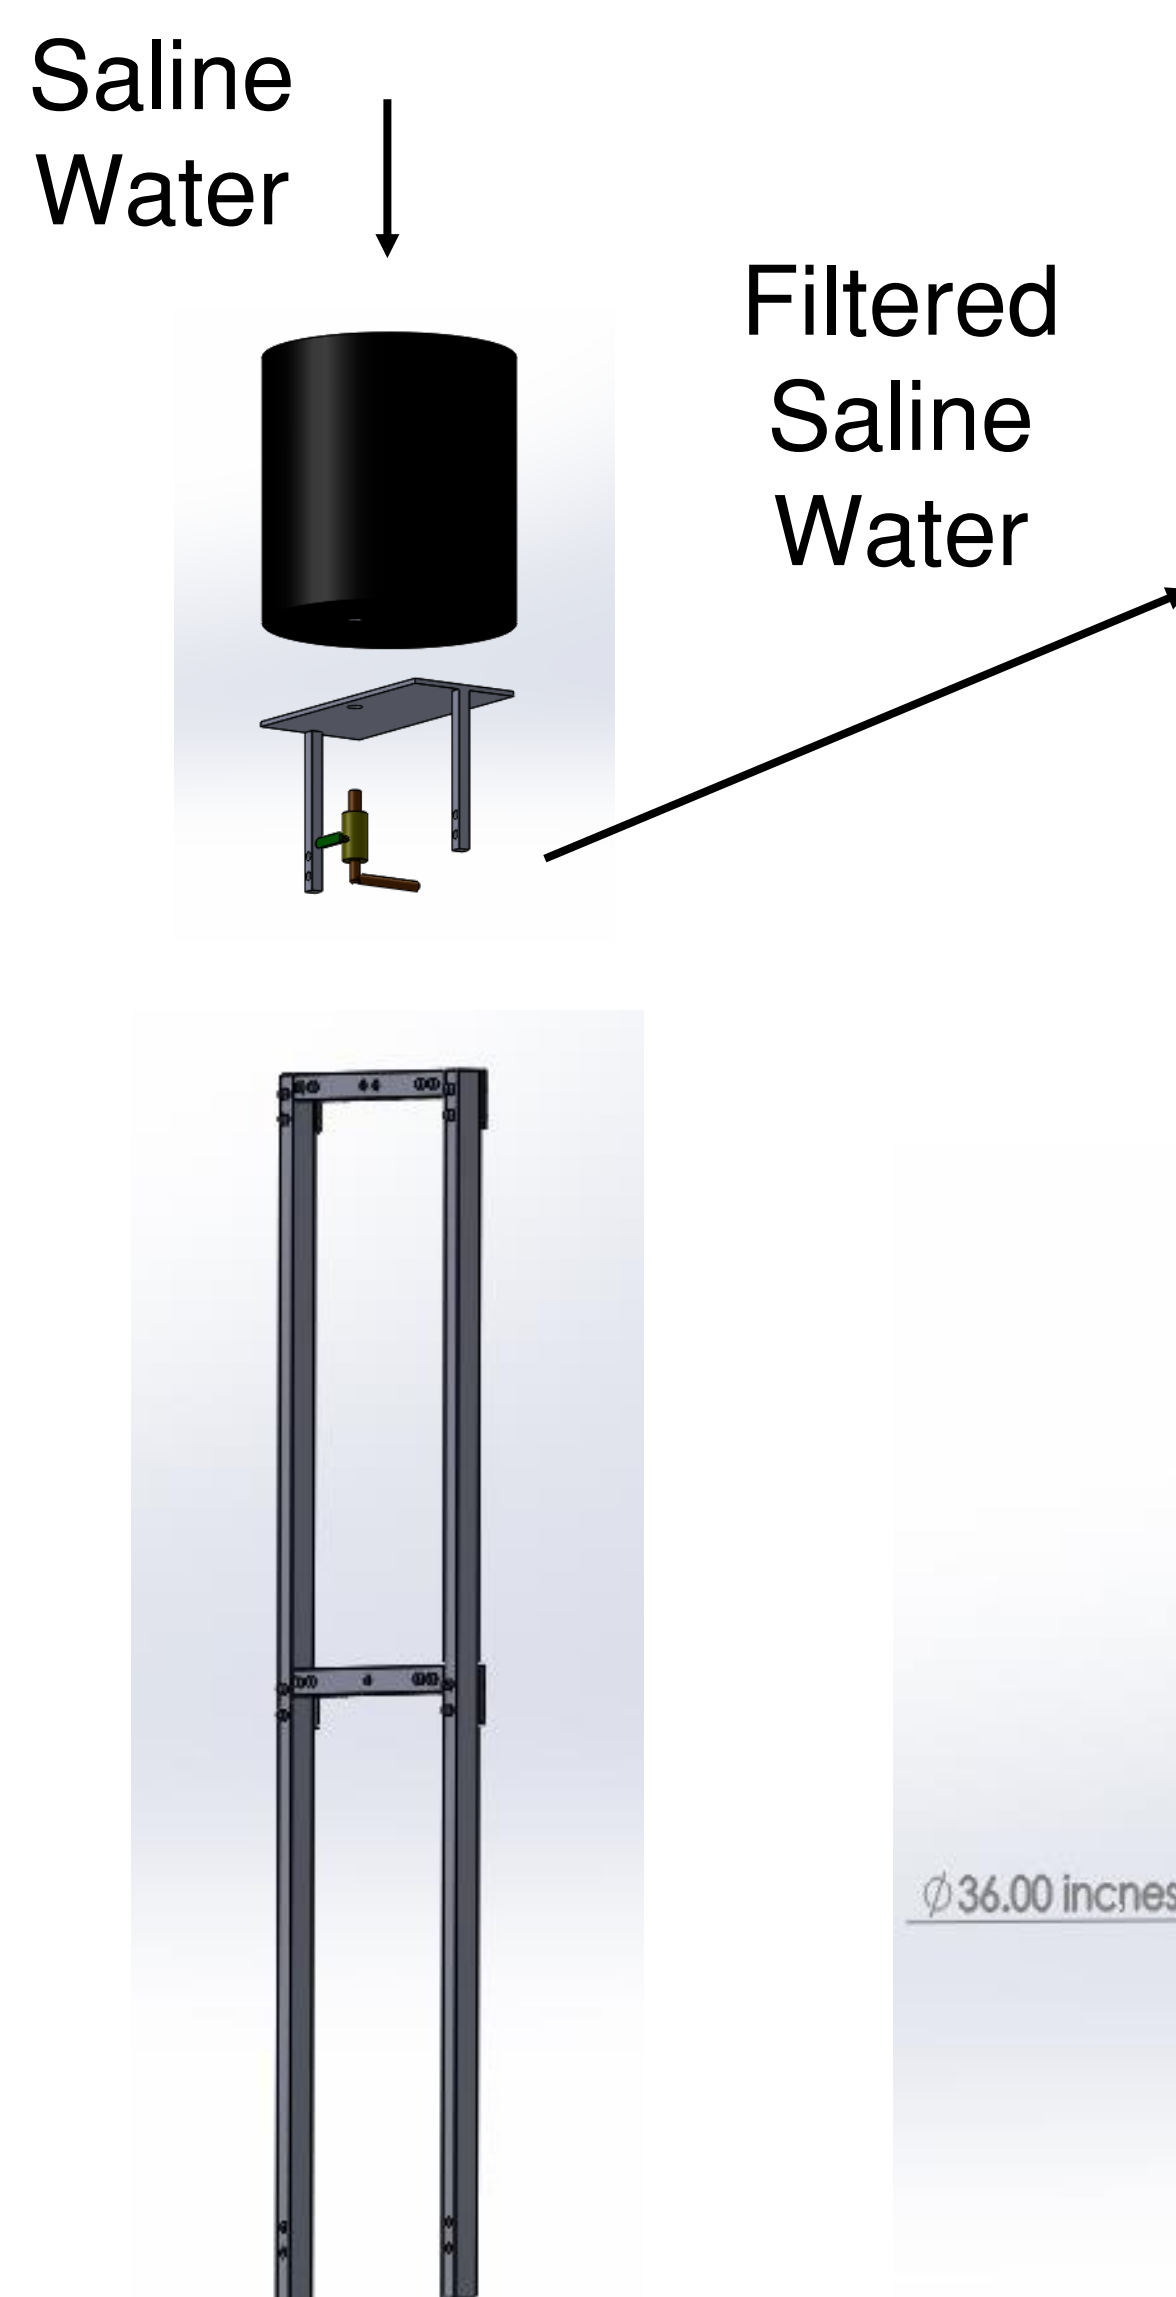


Figure 2. System process flow with assembled and exploded view

Focal Point and Temperature:



- Temperature increases as the focal point width decreases
- Temperature is highest in the center and decreases moving towards the stands

Figure 3. Visual focal point on trough

Significant Parameters:

- **Focal point:** 3/8 in. to 2 in.
- **Assembly/Disassembly time:** 40min / 10min
- **Operation time:** 6 hrs. (9 AM - 3 PM) *includes one hour preheat time
- **Daily output:** 3 gallons / day
- **Price unit price:** 61 ¢ / gallon
- **Total Price:** \$1,485.62
- **Percent of total budget:** 30%

Future Work:

- Improved pressure pumping system
- Test potable water output with varying ambient temperature, pressure, etc.
- Increase output or decrease cost where possible

Acknowledgements:

Thanks to Dr. Devine, Dr. Lin, Ian Winger, Dr. Shih and Dr. Gupta